


SEZIONE A-A DELTA CODE: 6520

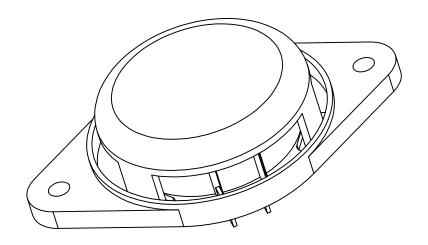

SPECIFICATIONS:

ELECTRICAL RATING: 3A @ 12-14 VDC

LIFE AT RATED LOAD: 10,000 cycles inductive, 75,000 cycles resistive MECHANICAL LIFE: 300,000 cycles

OPERATING TEMPERATURE: -20°F to 150°F

CONNECTION EFFORT: Up to 10 lbs. per terminal

OPERATING FORCE: See print